

## **ROTO 50.21 S PLUS**



## **ROTO 50.21 S PLUS**

PERFORMANCE		CAB		
nladen Weight (lbs)	34,400	Tilting Cab	•	
laximum Load Capacity (lbs)	11,000	Cab Finishing	Premium	
ft Height (ft)	69′ 0"	MCDC	•	
aximum Reach (ft)	59′ 1″	FOPS II Cab		•
ad Capacity at Max. Lift Height (lbs)	5,500	ROPS Cab		•
ad Capacity at Max. Reach (lbs)	1,600	Controls	Electronic Joystick	
om Side-Shift (in)	-	Reverse Shuttle	Dual Reverse	
me Leveling	12° 4°			
m Sections	4	CONFIGURATION		
		Hydropneumatic Suspension CS Merlo		-
OWERTRAIN		Hydropneumatic Suspension BSS Merlo	O	-
ne	lveco	Hydropneumatic Suspension EAS Merlo	neumatic Suspension EAS Merlo	
lacement/Cylinders	4.5/4	Work lights on cab		•
ine Power (HP)	170	Sun-shade in the cab		•
versible Fan	-	Tac-lock		•
ximum Speed (mph)	25	Pre-arrangement for aerial work platform		•
l Tank Capacity (gal)	37	Two floating forks		•
Blue Tank Capacity (gal)	11	Pedal Inching-Control		-
rostatic Transmission	• -2V	Permanent four-wheel drive		•
)	•	4 Wheel Drive		•
es	Drop Portal	3 Steering Modes		•
ducers	RR700	Standard tires		18-22.5
akes	Dry Discs	Hydraulically controlled stabilizers		Multi-positio
tomatic Parking Brake	•	Turret rotation		360°
		Tractor type approval		-
YDRAULIC				
draulic Pump	LS + FS			
livery/Pressure (psi-gal/min)	3,625-37+26			
draulic Oil Tank Capacity (gal)	39.6			
uxiliar Hydraulic Service on Boom	•			
ear Service Line	-			

The technical data and other information in this document are not binding. We reserve the right to modify our products without prior notice as part of our policy of continuous improvement

7′ 11″

10′ 4″

1′ 4″

Length (ft)

Wheelbase (ft)

Turning Radius Over Tires

September 2020




Width (ft)

Height (ft)

Ground Clearance

22′ 7″ 10′ 0″

12′ 7″

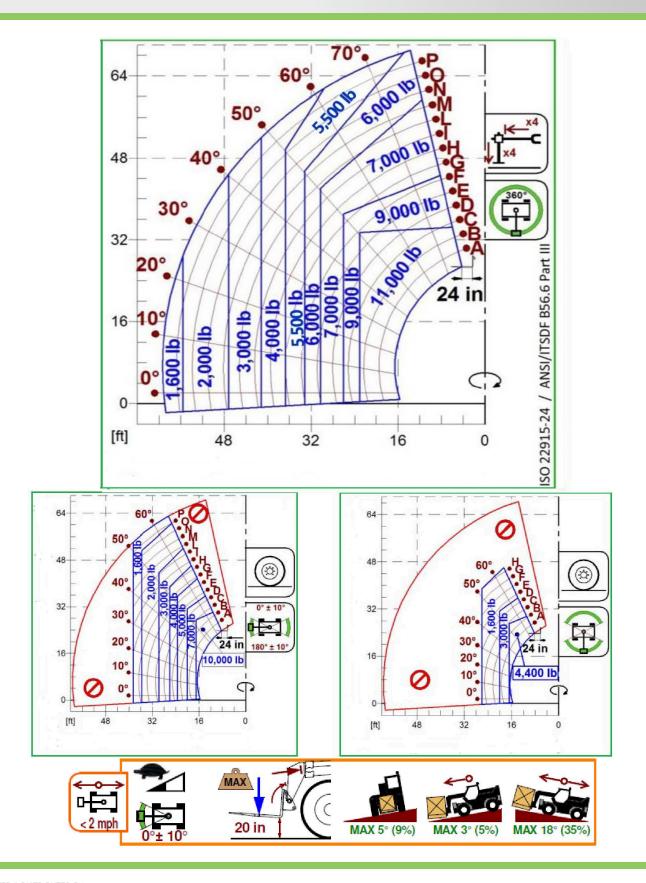





## **ROTO 50.21 S PLUS**



ams-merlo.com

